



remarkableTM

MARKER ADHESIVE

www.crownusa.com

Achieve the *resilience* of epoxy adhesion paired with the *user-friendly* application and flexibility of a one part hot-applied material *only better!*

	BITUMINOUS	EPOXY	REMARKABLE
GREAT PERFORMANCE ON CONCRETE		✓	✓
QUICK CURE TIME	✓		✓
NO PACKAGING WASTE			✓
NO OFFENSIVE ODOR		✓	✓
WON'T SCORCH AND "CHUNK"		✓	✓

WHAT IS REMARKABLE MARKER ADHESIVE?


Crown USA's remarkable Marker Adhesive is a single component hot melt adhesive that when properly applied will bond pavement markers to concrete, epoxy overlay, or asphalt roadway surfaces. Since it is hot applied, there is no mixing, or pot life requirements, and is typically ready for traffic in under 5 minutes.

REMARKABLE ADHESIVE SPECIFICATIONS

Color	Gray
Luminance	Y= 35 maximum
Specific Gravity	1.7 - 2.0
Binder Content	25% minimum
Softening Point	90 C minimum
Shore Hardness	20 maximum
Flowability	40% residue maximum

Typical Yield: For standard 4" rpm's = 4 markers/pound

Available in 25lb bags, 40 bags per pallet - Minimum order: 1000lbs

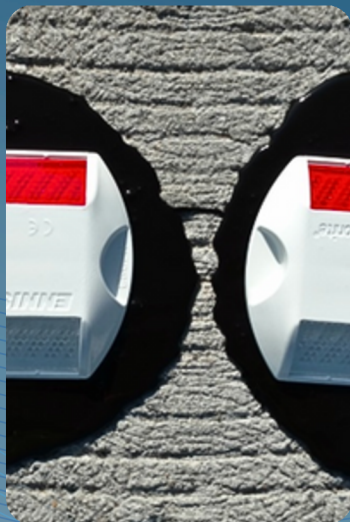

2018 NTPEP MARKER ADHESIVE TEST DECK I-95 SB DARIEN, GA

Evaluation Period: 2 years

Result Concrete:

remarkable MA = 77% retained
 Bituminous MA = 31% retained
 Flexible Bit. MA = 65% retained

Result Asphalt:

remarkable MA = 100% retained
 Bituminous MA = 81% retained
 Flexible Bit. MA = 81% retained

706-553-9500
 sales@crownausa.com

